

Ultra II D-TEK

VEHICLE LOOP DETECTOR

Applications

The Ultra II D-TEK was designed to be a more compact, energy efficient, cost effective and reliable detector that is easier to install and setup.

Sensitivity selection is simplified by the ULTRAMETER™ display that indicates the appropriate sensitivity setting to detect the vehicle positioned on the loop.

The 10 sensitivity settings allow for finer adjustment of the detection level, while the 4 frequency settings provide greater flexibility in preventing crosstalk in multi-loop applications.

D-TEK



EMX

INDUSTRIES

EMX Industries, Inc.

4564 Johnston Parkway, Cleveland, Ohio 44128

P. 800 426 9912 F. 216 518 9884

Sales Inquiries: salesupport@emxinc.com **Technical Support:** technical@emxinc.com

www.emxinc.com

Indicators & Controls

- **Dip Switch** 4 positions that control frequency, ASB (automatic sensitivity boost) and Pulse/Presence (provides for reducing noise interference)
- **Sensitivity** Rotary switch is used to fine tune adjustment of loop detection height.
- **Output LED** The Red LED indicates the detection output status
- **Ultrameterm** Visual indicator of optimum loop sensitivity setting
- **Power LED** During operation, the Green LED permanently ON indicates a normal operating condition; blinking indicates a loop failure condition.
- **Frequency Count Switch** Momentary push button to check operating frequency of the loop. (indicated by the Red LED blinking at 10 kHz per blink). May also be used to hard re-set the Ultra DTEK




The ULTRAMETER™ display makes installation, set-up and troubleshooting easy. Each time a vehicle is moved onto the loop, the display indicates the sensitivity necessary to detect vehicle. Simply set the sensitivity to the value displayed to detect the vehicle. Interference or crosstalk from adjacent loops or other sources are displayed as a constantly varying number on the ULTRAMETER™. This condition may be avoided by maintaining a minimum of 5 kHz separation in multi-loop applications.



PR-XX (light preformed loop with lighting protection)



LD-7P 7 position plug terminal for wiring (included)

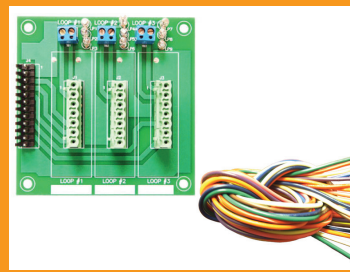

ULTRA II-MB (Ultra II Motherboard)



130-10020316

Technical Data

Power Supply
Current Draw
Dimensions
Weight
Loop Inductance
Environmental Tracking
Operating Environment
Housing Material
Connection
Loop Compensation
Loop Frequency
Surge Protection
ULTRAMETER Display
Output
Power/Loop Fault Indicator
Detect/Frequency Count Indicator
Frequency Count
Pulse/Presence
Sensitivity
ASB (Automatic Sensitivity Boost)

12-30 VDC and 24 VAC (reverse polarity protected)
 18 mA max.
 L= 3.0in (76mm) W= 0.9in (22mm) H= 2.75in (70mm)
 0.15 lbs. (68g)
 20...2000µH (Q factor > 5)
 Automatic Compensation
 -40° C...82° C (-40°F...180° F) 0...95% relative humidity
 PVC (Green)
 Plug-in 7 Position screw terminal to aid in wiring.
 Isolation transformer allows operation with poor quality loops
 4 settings (low, med-low, med-hi, high)
 Loop circuitry protected by surge suppressors
 Indicates optimum sensitivity level, 0-9 Diagnostic aid
 Relay 1A@24VDC Common, Normally Open, Normally Closed
 Green LED
 Red LED
 To aid in detector set up and prevention of cross-talk
 Allows the relay output to send either a pulse output or have constant presence.
 10 levels 0-9
 Increases sensitivity after initial detection to prevent dropout due to high bed vehicles

Ordering Information

- ULTRA II D-TEK 12 – 24 V DC and 24 V AC. I = 18 mA max.
- PR-XX EMX Lite Preformed Loop XX =size
- LD-7P 7 position pluggable screw terminal adaptor to aid in wiring connections.
- HAR-12-2 12 position wiring harness.
- ULTRA II-MB Ultra II Motherboard.



WARRANTY EMX INC. the product described herein for a period of 2 years under normal use and service from the date of sale to our customer. The product will be free from defects in material and workmanship. This warranty does not cover ordinary wear and tear, abuse, misuse, overloading, altered products, or damage caused by the purchaser from incorrect connections, or lightning damage. There is no warranty of merchantability. There are no warranties expressed, implied or any affirmation of fact or representation which extend beyond the description set forth herein. EMX Inc. sole responsibility and liability, and purchaser's exclusive remedy shall be limited to the repair or replacement at EMX's option of a part or parts not so conforming to the warranty. In no event shall EMX Inc. be liable for damages of any nature, including incidental or consequential damages, including but, not limited to any damages resulting from non-conformity defect in material or workmanship. Rev 2.1 07/09/08

Rev. 1.2 11/05/2010